




NTN 6315LLB deep groove ball bearings

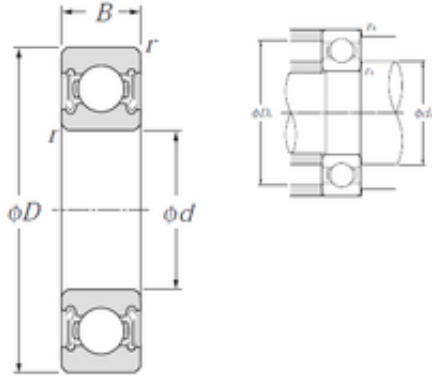

Bearing No. 6315LLB

6315LLB Bearing 2D drawings and 3D CAD models

Size	75x160x37 mm
Bore Diameter	75 mm
Outer Diameter	160 mm
Width	37 mm
d	75 mm
D	160 mm
B	37 mm
C	37 mm
r min.	2,1 mm
da min.	86 mm
da max	99 mm
Da max.	149 mm
ra max.	2 mm
Weight	3,02 Kg
Basic dynamic load rating (C)	113 kN
Basic static load rating (C0)	77 kN
(Grease) Lubrication Speed	4 300 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	3.054
EAN	4547359005820
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1   ISO P0



## LEA?Roller Industry Co.,Ltd

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	75MM Bore; 160MM Outside Diameter; 37MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove   Non-Friction Nitrile Rubber Seal   Shell Alvania Prelubricated
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Weight / LBS	6.87842
Bore	2.953 Inch   75 Millimeter
Outer Race Width	1.457 Inch   37 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Outside Diameter	6.299 Inch   160 Millimeter
bore diameter:	75 mm
static load capacity:	77000 N
outside diameter:	160 mm



## LEA?Roller Industry Co.,Ltd

precision rating:	ISO Class 0
overall width:	37 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	37 mm
snap ring included:	Without Snap Ring
outer ring width:	37 mm
internal clearance:	CN
maximum rpm (grease):	4300 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	2.1 mm
dynamic load capacity:	113000 N
manufacturer product page:	<a href="#">Click here</a>