


NTN 6016LLU deep groove ball bearings

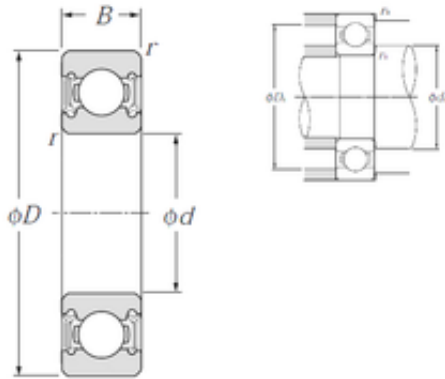

Bearing No. 6016LLU

Size	80x125x22 mm
Bore Diameter	80 mm
Outer Diameter	125 mm
Width	22 mm
d	80 mm
D	125 mm
B	22 mm
C	22 mm
r min.	1,1 mm
da min.	86,5 mm
da max	91,5 mm
Da max.	118,5 mm
ra max.	1 mm
Weight	0,854 Kg
Basic dynamic load rating (C)	47,5 kN
Basic static load rating (C0)	40 kN
Reference speed	3 100 r/min
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0.856
EAN	4547359004199
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0

6016LLU Bearing 2D drawings and 3D CAD models



LEA?Roller Industry Co.,Ltd

Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	80MM Bore; 125MM Outside Diameter; 22MM Outer Race Diameter; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	6016LLU/2AS
Weight / LBS	1.892
Bore	3.15 Inch 80 Millimeter
Outside Diameter	4.921 Inch 125 Millimeter
Outer Race Width	0.866 Inch 22 Millimeter
bore diameter:	80 mm
precision rating:	ISO Class 0
outside diameter:	125 mm
finish/coating:	Uncoated
overall width:	22 mm
bearing material:	High Carbon Chrome Steel



LEA?Roller Industry Co.,Ltd

bore type:	Round
cage material:	Steel
closure type:	Double Sealed
inner ring width:	22 mm
row type & fill slot:	Single Row Non-Fill Slot
outer ring width:	22 mm
snap ring included:	Without Snap Ring
maximum rpm (grease):	3100 rpm
internal clearance:	CN
fillet radius:	1.1 mm
operating temperature range:	-40 to 120 ° C
maximum rpm:	6200 RPM
dynamic load capacity:	47500 N
series:	60
static load capacity:	40000 N
manufacturer product page:	Click here